

SST™ Central Tube Steel Armour Outdoor Cable 8F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Part Number:
008EEC-13122A20

Corning central tube cables with corrugated steel armoring are designed for outdoor use for campus, city and intercity backbones in duct and direct burial installations.

The central tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibers are color coded for quick and easy identification.

The cable construction, based on a central buffer tube, is very compact, light, flexible and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts and for direct burial.

Features and Benefits

Waterblocking technology

Outside Plant (OSP) applications

UV and microbe resistant

Can be directly buried or installed in ducts

Corrugated steel armoring


Rodent, mechanical protection and direct buried applications

Small diameter and bend radius

Easy installation in space-constrained areas

Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

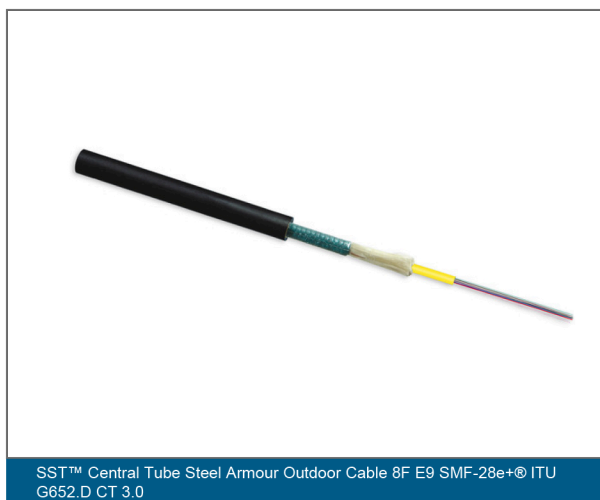

SST™ Central Tube Steel Armour Outdoor Cable 8F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Specifications

General Specifications

Environment	Outdoor
Cable type	Single Tube
Product type	Corrugated steel armour
Fibre category	Single-mode (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)(SR)2Y
Application	Direct Buried, Duct
Fibre count	8

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-2 F5
Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2

Standards

Fibre Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2
-----------------	--

Environmental Conditions

Temperature range, installation	-25 °C - 70 °C
Temperature range, operation	-5 °C - 50 °C
Temperature range, storage	-20 °C - 60 °C

Cable Design

Cable marking	Metre - Handset - Sine - CORNING - Year -SST (TM) A-DQ(ZN)(SR)2Y 8F E9 CT 3.0
---------------	---

SST™ Central Tube Steel Armour Outdoor Cable 8F E9 SMF-28e+® ITU G652.D CT 3.0



Cable Design

Fibre count	8
Number of ripcords	2
Outer jacket colour	Black
Outer jacket material	Linear Low Density Polyethylene (LLDPE)
Outer jacket nominal thickness	1.5 mm
Tensile strength elements and/or armouring - Layer 1	Corrugated steel tape armour with dielectric strength elements (aramid yarns) and swellable elements
Buffer tube diameter	3 mm
Fibre colouring	Blue, orange, green, brown, grey, white, red, black

Mechanical Specifications

Crush resistance	2000 N/10 cm
Max. tensile strength for installation	1000 N
Min. bend radius installation	150 mm
Min. bend radius operation	110 mm
Nominal outer diameter	7.5 mm

Optical Characteristics

Cable cutoff wavelength	1260 nm
Fibre code	E
Fibre name	E9/125 SMF28e+®
Fibre Type	Single-mode
Fibre core diameter	8.2 µm
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Serial 1 gigabit ethernet	5000 MHz*km / - / -
Serial 10 gigabit ethernet	10000 MHz*km / - / 40000 MHz*km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fibre category	OS2

SST™ Central Tube Steel Armour Outdoor Cable 8F E9 SMF-28e+® ITU G652.D CT 3.0



Ordering Information

Product Number	008EEC-13122A20
EAN Code	4042673580652
Maximum delivery length	4000 m
Weight	58 kg/km



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2023 Corning Optical Communications. All rights reserved.