

Central Tube Steel Armor Indoor/Outdoor Cable 1x4 E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Part Number:
004EEY-13122H2G

Corning MPC (multipurpose cable) central tube cables with corrugated steel armoring are flame-retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct, direct burial and riser applications. The central tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibers are color coded for quick, easy identification. Based on a central buffer tube, the cable construction is compact, light, flexible and ideal for connections requiring a moderate fiber count. The cables are designed for installation in conduits, ducts, direct burial and in-house.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

UV- and microbe-resistant

Can be installed in ducts or conduits

Corrugated steel armoring

Rodent, mechanical protection and direct buried applications

Small diameter and bend radius


Easy installation in space-constrained areas

Fibers color coding to Telcordia-Bellcore

Easy identification of the individual fibers

Flame retardant

LSZH™ /FRNC

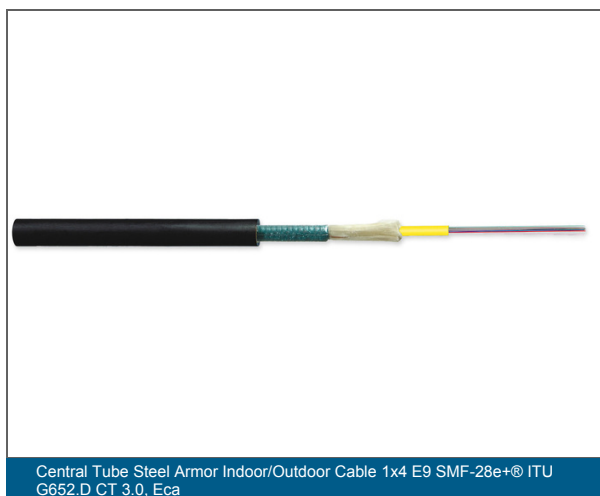

Central Tube Steel Armor Indoor/Outdoor Cable 1x4 E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Specifications

General Specifications	
Installation Methods	Direct Buried, Duct, Horizontal, Riser
Cable Type	Single Tube
Environment	Indoor/Outdoor
Product Type	Corrugated Steel Armor
Fiber Category	Single-mode (OS2)
Flame Rating	LSZH/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)(SR)H
Cable geometry	Round

Standards	
Fiber Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2
Reaction to Fire	Eca
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-22 Method F5B
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable)
Reaction to Fire Requirements	Reaction to fire according to EN 50575 and EN 13501-6

Environmental Conditions	
Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Operation	-30 °C to 75 °C
Temperature Range, Storage	-40 °C to 75 °C
Temperature Range, Storage (Stored on drum with original packing)	-40 °C to 75 °C

Central Tube Steel Armor Indoor/Outdoor Cable 1x4 E9 SMF-28e+® ITU G652.D CT 3.0



Cable Design	
Cable Marking	Meter - Handset - CE 17 EN 50575 Eca - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)(SR)H 4 E9 CT 3.0 LSZH(TM)/FRNC
Fiber Count	4
Number of Ripcords	2
Outer Jacket Color	Black
Outer Jacket Material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer Jacket Nominal Thickness	1.5 mm
Tensile Strength Elements and/or Armoring - Layer 1	Aramid yarn with swellable elements
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor with water-swellaable tape
Buffer Tube Diameter	3 mm
Buffer Tube Water Blocking	Thixotropic Gel
Fiber Coloring	Blue, Orange, Green, Brown
Fibers per Tube	4

Mechanical Specifications	
Crush Resistance	2000 N/10 cm
Max. Tensile Strength for Installation	1000 N
Min. Bend Radius Installation	150 mm
Min. Bend Radius Operation	110 mm
Nominal Outer Diameter	7.5 mm

Optical Characteristics	
Fiber Code	E
Performance Option Code	22
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Single-mode (OS2)
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km

Central Tube Steel Armor Indoor/Outdoor Cable 1x4 E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Optical Characteristics

Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D
Fiber Core Diameter	8.2 µm
Cladding diameter	125 µm
Coating diameter	242 µm
Dispersion @ 1550 nm	≤ 18 [ps/(nm*km)]
Dispersion @ 1625 nm	≤ 22 [ps/(nm*km)]
Cable cutoff wavelength	1260 nm
Mode-Field Diameter at 1310 nm	9.2 µm
Mode-Field Diameter at 1550 nm	10.4 µm
PMD Link Design Value	≤ 0.06 ps/√km
PMD maximum individual fiber	≤ 0.1 ps/√km

Dimensions

Cable Weight	76 kg/km
Max. cable length per reel/drum	6000 m



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.