

SST™ Central Tube Steel Armor Outdoor Cable 4F E9 SMF-28e+® ITU G652.D CT 3.0



Part Number:
004EEC-13122A20

Corning central tube cables with corrugated steel armoring are designed for outdoor use for campus, city and intercity backbones in duct and direct burial installations.

The central tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibers are color coded for quick and easy identification.

The cable construction, based on a central buffer tube, is very compact, light, flexible and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts and for direct burial.

Features and Benefits

Waterblocking technology

Outside Plant (OSP) applications

UV and microbe resistant

Can be directly buried or installed in ducts

Corrugated steel armoring


Rodent, mechanical protection and direct buried applications

Small diameter and bend radius

Easy installation in space-constrained areas

Fibers color coding to Telcordia-Bellcore

Easy identification of the individual fibers

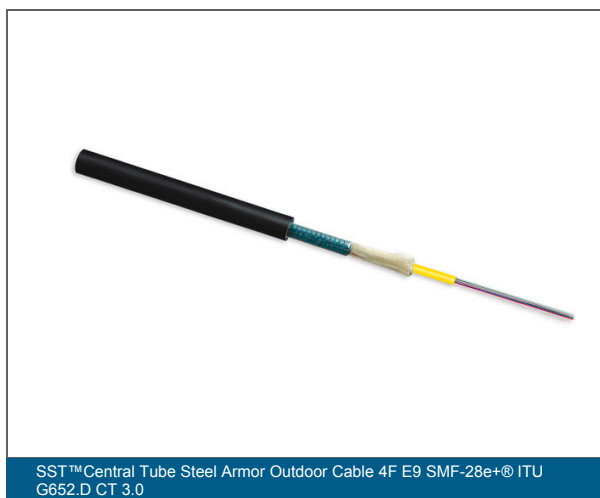

SST™ Central Tube Steel Armor Outdoor Cable 4F E9 SMF-28e+® ITU G652.D CT 3.0

SST™ Central Tube Steel Armor Outdoor Cable 4F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Specifications

General Specifications	
Installation Methods	Direct Buried, Duct
Cable Type	Single Tube
Environment	Outdoor
Product Type	Corrugated Steel Armor
Fiber Category	Single-mode (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)(SR)2Y
Cable geometry	Round

Standards	
Fiber Standards	TIA/EIA-492CAAB, IEC 60793-2-50 Type B1.3, ITU-T G.652.D, ISO/IEC 11801 Ed.2.2
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-2 F5

Environmental Conditions	
Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Operation	-20 °C to 60 °C
Temperature Range, Storage	-25 °C to 70 °C

Cable Design	
Cable Marking	Meter - Handset - Sine - CORNING - Year -SST (TM) A-DQ(ZN)(SR)2Y 4 E9 CT 3.0
Fiber Count	4
Number of Ripcords	2
Outer Jacket Color	Black
Outer Jacket Material	Linear Low Density Polyethylene (LLDPE)
Outer Jacket Nominal Thickness	1.5 mm

SST™ Central Tube Steel Armor Outdoor Cable 4F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Cable Design

Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor with dielectric strength elements (aramid yarns) and swellable elements
Buffer Tube Diameter	3 mm
Cable Marking Method	Hotfoil printing
Fiber Coloring	Blue, Orange, Green, Brown
Fibers per Tube	4

Mechanical Specifications

Crush Resistance	2000 N/10 cm
Max. Tensile Strength for Installation	1000 N
Min. Bend Radius Installation	150 mm
Min. Bend Radius Operation	110 mm
Nominal Outer Diameter	7.5 mm

Optical Characteristics

Fiber Code	E
Performance Option Code	22
Fiber Category	OS2
Fiber Type	Single-mode (OS2) / 250 µm
Fiber Name	Single-mode (OS2)
Maximum Attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Compliance	ITU-T G.652.D
Fiber Core Diameter	8.2 µm
Cladding diameter	125 µm
Coating diameter	242 µm
Dispersion @ 1550 nm	≤ 18 [ps/(nm*km)]
Dispersion @ 1625 nm	≤ 22 [ps/(nm*km)]
Cable cutoff wavelength	1260 nm

SST™ Central Tube Steel Armor Outdoor Cable 4F E9 SMF-28e+® ITU G652.D CT 3.0



Optical Characteristics	
Mode-Field Diameter at 1310 nm	9.2 μm
Mode-Field Diameter at 1550 nm	10.4 μm
PMD Link Design Value	≤ 0.06 ps/√km
PMD maximum individual fiber	≤ 0.1 ps/√km

Dimensions	
Cable Weight	58 kg/km
Max. cable length per reel/drum	4000 m



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
00 800 2676 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2026 Corning Optical Communications. All rights reserved.