

FREEDM™ Tight Buffer Indoor/Outdoor Cable 4F G50 MMF ClearCurve® OM3 0.9mm TB3, Dca-s1a, d1, a1

CORNING

Part Number:
004T8X-32188E2G

Corning® MPC (multipurpose cable) tight-buffered cables are flame-retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct and riser applications. The tight-buffered construction facilitates easier termination for low-fibre-count applications in the local area network (LAN) and eliminates need for fan-out kits. These cables are designed for installation in conduits, ducts and in-house.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

All-dielectric cable construction

Requires no grounding or bonding

UV- and microbe-resistant

Can be installed in ducts or conduits

Dry cable core by means of water swellable elements

Allows efficient and craft-friendly cable preparation in outdoor or indoor/outdoor applications

Small diameter and bend radius


Easy installation in space-constrained areas

TB3 tight-buffered construction

Easy and consistent stripping up to 10 cm

Flame retardant

LSZH/FRNC

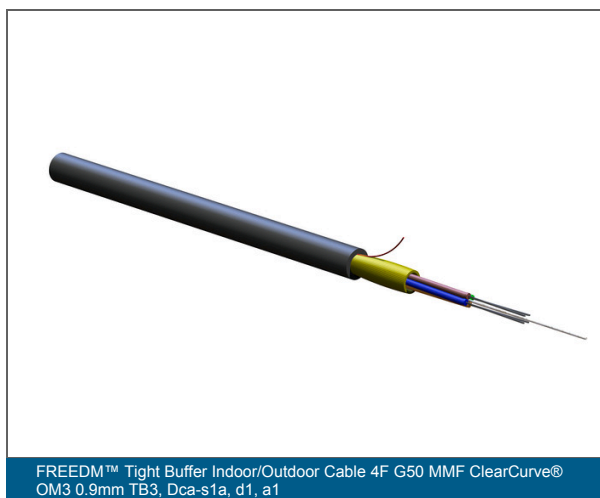

FREEDM™ Tight Buffer Indoor/Outdoor Cable 4F G50 MMF ClearCurve® OM3 0.9mm TB3, Dca-s1a, d1, a1

CORNING

Specifications

General Specifications

Cable type	Tight-buffered
Environment	Indoor/Outdoor
Product type	Dielectric
Fibre category	50 µm MM (OM3)
Flame rating	LSZH/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-VQ(ZN)H
Application	Direct Buried, Duct, Vertical Riser, General purpose, Horizontal
Cable geometry	Round

Standards

Reaction to fire	Dca, s1a, d1, a1
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Waterblocking	IEC 60794-1-22 Method F5B
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable) and IEC 60332-3-24 (bunch of cables)
Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low Smoke to IEC 61034
Halogen content test	Zero Halogen according to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2

Environmental Conditions

Temperature range, installation	-5 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C
Temperature range, storage	-25 °C to 70 °C

FREEDM™ Tight Buffer Indoor/Outdoor Cable 4F G50 MMF ClearCurve® OM3 0.9mm TB3, Dca-s1a, d1, a1

CORNING

Cable Design	
Cable marking	"Metre - Handset - CE 17 EN 50575 Cca-s1a,d1,a1 - Sine - CORNING - Fiber Optic Cable - Year - FREEDM(TM) U-VQ(ZN)H 4 OM3CC TB3 0.9 LSZH(TM)/FRNC"
Fibre count	4
Number of ripcords	1
Outer jacket colour	Black
Buffering diameter	900 µm
Outer jacket material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer jacket nominal thickness	0.8 mm
Tensile strength elements and/or armouring - Layer 1	Aramid yarn
Tensile strength elements and/or armouring	Aramid yarn
Tight buffer colour	Blue, orange, green, brown
Tight buffer type	TB3 (easy strip up to 10 cm)
Flame rating	LSZH/FRNC

Mechanical Specifications	
Crush resistance	750 N/10 cm
Crush resistance (reversible), outdoor cable	750 N/10 cm
Fire load	0.4 MJ/m
Max. tensile strength for installation	600 N
Min. bend radius installation	90 mm
Min. bend radius operation	45 mm
Nominal outer diameter	4.5 mm

Optical Characteristics	
Fibre code	T
Fibre name	G50/125 ULTRA-BEND 7.5
Fibre Type	Multimode
Fibre core diameter	50 µm

FREEDM™ Tight Buffer Indoor/Outdoor Cable 4F G50 MMF ClearCurve® OM3 0.9mm TB3, Dca-s1a, d1, a1

CORNING

Optical Characteristics

Minimum effective modal bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. overfilled launch (OFL) bandwidth	1500 MHz*km / 500 MHz*km
Serial 1 gigabit ethernet	1100 MHz*km / 600 MHz*km
Serial 10 gigabit ethernet	300 MHz*km/ 333 MHz*km
Typical attenuation	2.4 dB/km / 0.8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fibre category	OM3

Dimensions

Cable Weight	20 kg/km
Max. cable length per reel/drum	4000 m



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea