

FutureCom™ S/FTP 2000/22, blue Category 8.2, 1000 m



Part Number:
CCXFCB-ND047-C001-L7

The FutureCom™ copper data cables with high -density braiding are especially interference -resistant and therefore particularly suitable for deployment in environments of increased electromagnetic interferences, such as data centres and manufacturing areas as well as recommended for high quality conscious customers.

Transmission of 40GbE/s are supported.

Features and Benefits

S/FTP 2000/22 cable specified up to 2000 MHz

Fulfills all requirements according to standards EN 50288-12-1, IEC 61156-9, EN 50173-1 and ISO/IEC 11801

Each twisted pair is shielded with metal foil (PIMF)

Wire color coding: white/blue, white/orange, white/green, white/brown

Complete shielding with tinned copper braid shield (coverage approx. 60%)


Streamlined design, lightweight

Low skew between the pairs

Flame retardant according to IEC 60332-3-24 and EN 13501-6, non-corrosive according to IEC 60754-2 (NC) and IEC 61034

Low smoke according to IEC 61034 and EN 50268; halogen-free (LSZH™)

No development of toxic gases in case of fire

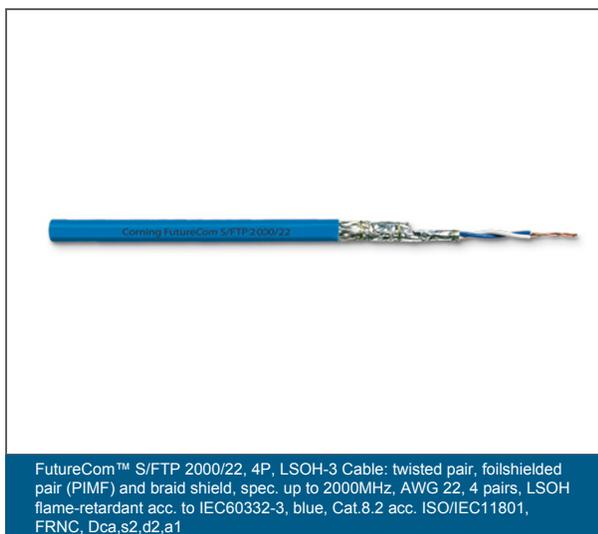

FutureCom™ S/FTP 2000/22, blue Category 8.2, 1000 m

CORNING

Specifications

General Specifications

Environment	Indoor
Category	8.2
Cable Type	S/FTP
Bandwidth	2000 MHz
Halogen-free	Yes
Construction	Simplex, 4P
Reaction to fire	Dca, s2, d2, a1

Standards

Flame propagation test	Flame retardant according to IEC 60332-3-24 and EN 50266-2-4
------------------------	--

Environmental Conditions

Temperature Range, Installation	0 °C to 50 °C
Temperature Range, Operation	-20 °C to 60 °C

Cable Design

Conductor	22 AWG
Conductor Insulation	Halogen-free foam-skin material
Twisting	2 cores to a pair
Pair screen	Al-laminated foil around each pair
Overall screen	Copper braid, tinned
Outer Jacket Material	LSZH™/FRNC
Outer Jacket Color	Blue

FutureCom™ S/FTP 2000/22, blue Category 8.2, 1000 m



Mechanical Specifications

Fire Load	0.54 MJ/m
Nominal Outer Diameter	7.9 mm
Min. Bend Radius Installation	8x Cable-Ø
Min. Bend Radius Operation	3x Cable-Ø (over flat side)
Maximum Tensile Strength	140 N

Electrical Characteristics

Conductor resistance unbalance	1 %
Delay skew	20 ns/100 m
Max. loop resistance	130 Ω/km
Propagation delay	460 ns/m
Voltage rating	1 kV / 1min (wire-wire, wire-shield)
Insulation Resistance	5000 MΩ*km
Surface transfer impedance	5 mΩ
Propagation Velocity at >10 MHz (NVP*c)	73 %
Coupling Attenuation	85 dB

Ordering Information

Product Number	CCXFCEB-ND047-C001-L7
Maximum Delivery Length	1000 m
Weight	67 kg/km
Packing Type	Drum

Electrical Characteristics

Frequency [MHz]	1	4	10	100	300	600	1000	1200	1500	1600	2000
-----------------	---	---	----	-----	-----	-----	------	------	------	------	------

FutureCom™ S/FTP 2000/22, blue Category 8.2, 1000 m



Electrical Characteristics											
Attenuation according to Standard [db/100m]	2.1	3.8	5.8	19.0	32.7	47.1	61.9	68.4	77.2	80.0	90.5
Typical attenuation [db/100m]	1.9	3.5	5.0	18.0	29.0	46.0	58.0	64.0	75.0	76.0	83.0
NEXT according to Standard [db/100m]	78.0	78.0	78.0	75.4	68.2	64.0	60.4	59.0	57.8	57.3	55.9
Typical NEXT Values [db/100m]	105.0	102.0	102.0	100.0	97.0	96.0	89.0	87.0	83.0	78.0	75.0
ACR-N according to Standard [db/100m]	76.0	74.3	72.2	56.9	35.6	16.6	-1.5	-9.2	-19.0	-23.0	-35.0
Typical ACR-N Values [db/100m]	103.0	99.0	97.0	82.0	68.0	50.0	31.0	23.0	8.0	2.0	-8.0



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
 +00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2022 Corning Optical Communications. All rights reserved.