
CORNING





Contents

Introduction	3
Features and Benefits	4
Direct Termination with UniCam® Connectors or Preterminated Assemblies	6
Splice Packs	7
Accessories	8
Cleaning Accessories	9

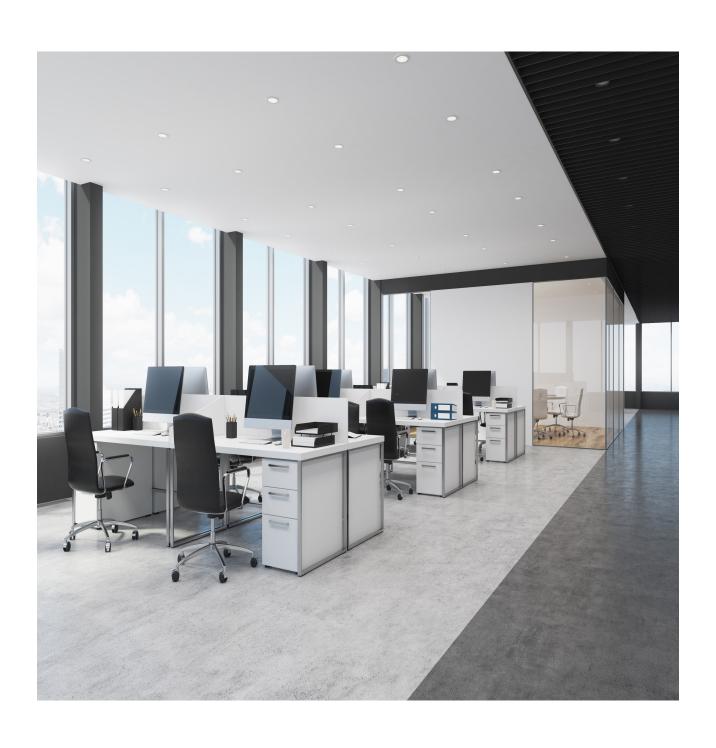


Introduction

Our LANscape Fibre Housings are designed to fulfill all your connectivity needs in any enterprise cabling installation that is based in a 19" rack. Whether you have to cable a building backbone, a small to medium sized campus network or even a low density distribution frame, the LANscape Fibre Housings always offer the right answer.

The three basic options of the product family give you flexibility and offer a panel for every installation:

- 1. Equipped with adapters and splice packs for maximum protection and easy segregation of fibres the fully loaded housing option is ready for fusion splicing.
- 2. The housing variation with adapters and splice bridge offers an economic alternative for fusion splicing applications, saving time while routing and splicing the fibres inside the housing.
- 3. For a low fibre count installation with either pre-terminated assemblies or using UniCam[®] connectors for field termination, the housing comes with a front panel including adpaters that match your choice of connectivity. Accessories for preterminated assemblies or Plug & Play™ or EDGE™ solutions trunks and FTTD/FTTO applications have to be ordered separately.

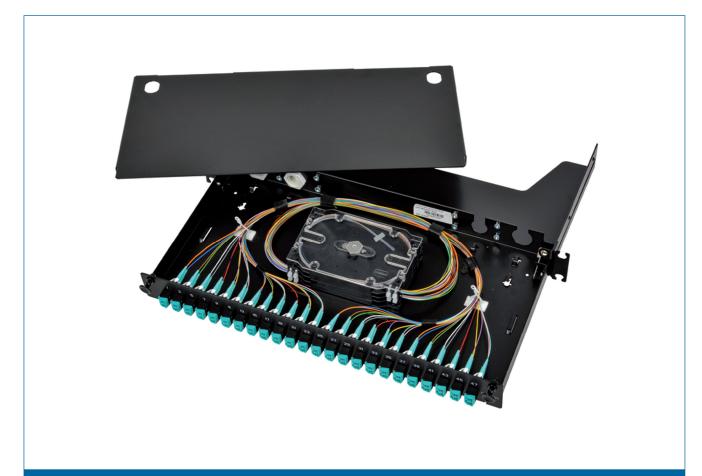

1U LANscape Fibre Housing, 48 fibres LC Duplex with splice packs | Photo LAN1-48AD-PGTL-B





Features and Benefits

Easy to remove top cover

No tools needed

Housing made of aluminium

Lightweight, but robust

Quick-mount feature

Allows single-person mounting of housing

Splice capacity of up to 96 fibres in 1U

Segmentation of fusion splices with splice packs of 12 fibres each or cassettes with 24 fibres each

Accomodate different termination methods

Pigtail splicing, field connectorisation, preterminated cables, Plug & Play™ or EDGE™ trunks can be installled in the same housing

Adapters with ceramic inserts and LC duplex with shutters

Minimal insertion loss and clean connectors

Low installation depth

Mountable in shallow cabinets or racks

Available in black and grey

Colour can be chosen to best suit the application

Multiple labelling options

Port numbering above and below adapter modules or customised labels






Ordering Information

	Height unit	Housing colour	Dimensions (HxWxD)
LANscape Fibre Housing	1U	Black	44 mm x 483 mm x 233 mm
LANscape Fibre Housing	1U	Grey	44 mm x 483 mm x 233 mm





Ordering Information



1 Select fibre count.

 $04 = 4 \text{ fibres}^*$

 $06 = 6 \text{ fibres}^*$

08 = 8 fibres*

12 = 12 fibres* 24 = 24 fibres*

36 = 36 fibres*

48 = 48 fibres (up to 48 use ADPT or PGTL configuration)

72 = 72 fibres (LC only with HDHS, HDCR, ADPT or BRDG configuration)

96 = 96 fibres (LC only with HDHS, HDCR, ADPT or BRDG configuration)

Select configuration option.

ADPT = front panel loaded with adapters only (Breakout version)

PGTL = universal splice pack with 12 pre-installed coloured pigtails (up to 48 fibres), protectors not included

HDHS = MFT splice tray for up to 24 heat-shrink splice protectors with 12 pre-installed coloured pigtails (protectors not included)

HDCR = MFT splice cassette for up to 24 crimp splice protectors with 12 pre-installed coloured pigtails (protectors not included)

BRDG = stackable splice bridge for up to 96 splices and easy loose tube or pigtail management with 12 pre-installed coloured pigtails

2 Select connectivity.

AD = Shuttered LC Duplex MM/OM3+OM4, aqua

AV = Shuttered LC Duplex MM/OM4, violet

AE = Shuttered LC Duplex UPC SM/OS2, blue

AF = Shuttered LC Duplex APC SM/OS2, green

E7 = SC Duplex MM/OM3+OM4, aqua

72 = SC Duplex UPC SM/OS2, blue

D9 = SC Duplex APC SM/OS2, green

5C = SC Simplex UPC SM/OS2, blue

6C = SC Simplex APC SM/OS2, green

E5 = ST[®] compatible MM/OM3+OM4, agua ring

19 = ST compatible UPC SM/OS2, blue ring

11 = FC SM/OS2, metal

P5 = E2000 APC SM/OS2, green

P6 = E2000 UPC SM/OS2, blue

Select housing colour.

B = Black

G = Grev

*Suitable for all adapter types with universal splice packs (heat-shrink/crimp) incuding 12 pigtails & cover



Direct Termination with UniCam® Connectors or Preterminated **Assemblies**

Partially loaded panels (or Breakout versions) are available with LC, SC, ST® compatible or E2000 connector interface and come equipped with fibre adapters. They are ideal for direct termination with UniCam® connectors or fusion splicing with the help of the LANscape splice packs. For details on the UniCam solution, we have an extensive resource centre online, that provides helpful information on installation methods, technical resources, videos and links to the products in the online catalogue, accessible under: www.corning.com/unicam.

LANscape fibre housings offer the possibility to use different additional accessories for cable strain relief to be placed at the back of the housing to enable the use of:

- · Preterminated cable assemblies, such as connectorised MIC™or Breakout Tight Buffer cables
- Plug & Play[™] or EDGE[™] Solutions trunks
- · Direct termination on low fibre count tight-buffered



Product representation - actual product may vary

Sample Bill of Materials

Part Number	Product Description	Amount	Unit
LAN1-06E7-ADPT-B	1U LANscape fibre housing, 6 fibres, SC Duplex MM/OM3/4	2	pcs
012T8X-32188E2G	12x MM/OM3 FREEDM™ Tight Buffer Indoor/Outdoor Cable	250	m
95-050-41-X	SC MM/OM3 High-Performance UniCam Connector	24	pcs
Tool Kit recommended:			
TKT-UNICAM-PFC2	High-Performance UniCam™ Tool Kit 2	1	pcs





Splice Packs

The universal LANscape® splice packs are suitable for LANscape Fibre Housings which provide up to 96 fibre (48 port) capacity for LC duplex and 48 fibre (24 port) capacity for SC duplex or ST® compatible connectivity. The easiest combination when fusion splicing is using a gel-free 250 µm cable, such as the FREEDM™ gel-free Indoor/Outdoor Cable.

- ullet Splice packs are including 12 Pigtails of 900 ${}^{\mu}$ m TB (Easy Strip) fibres pre-stripped to 250 ${}^{\mu}$ m
- Fibres are Telcordia colour-coded on both 900 μm and 250 μm layers
- \bullet Pigtails are 2 m long, 0.8 m 900 μm and 1.2 m 250 μm
- Splice packs are delivered with transparent cover and both heat-shrink and crimp splice organizer
- Each splice pack holds 12 fusion splices (max. 4 splice packs per 1U LANscape Fibre Housing)



Part Number	Description
SP12-03Q-S8	LC MM/OM4 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-03Q-S8-V	LC MM/OM4 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover, violet boots
SP12-03T-S8	LC MM/OM3 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-02R-S8	LC SM/OS2 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-39Q-S8	SC MM/OM4 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-39T-S8	SC MM/OM3 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-58R-S8	SC SM/OS2 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-50T-S8	ST MM/OM3 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover
SP12-61R-S8	ST SM/OS2 Universal Splice Pack (heat-shrink/crimp) including 12 pigtails & cover



Accessories

Part Number	Product Description	Units Per Delivery	
LAN1-STRN-C-B	LANscape U-clip EDGE cradle bracket, black	1/1	
LAN1-STRN-C-G	LANscape U-clip EDGE cradle bracket, grey	1/1	18 18
LANS-GRND-KIT	Grounding Kit for LAN housings	1/1	
LAN1-TRAY-HOLDER	LANscape metal holder for trays	1/1	
LAN1-ANGL-BKT-20-B	LANscape angled bracket for M20 PG glands, black	1/1	
LAN1-ANGL-BKT-20-G	LANscape angled bracket for M20 PG glands, grey	1/1	
LAN1-ANGL-BKT-25-B	LANscape angled bracket for M25 PG glands, black	1/1	
LAN1-ANGL-BKT-25-G	LANscape angled bracket for M25 PG glands, grey	1/1	
LAN1-STRN-T-B	LANscape strain relief bracket, T-shaped, black	1/1	



Accessories

Part Number	Product Description	Units Per	
LAN1-STRN-T-G	LANscape strain relief bracket, T-shaped, grey	Delivery 1/1	
LANS-M20	LANscape Cable glands M20 for cable diameters 6-12 mm, pack of 10	10/1	
LANS-M25	LANscape Cable glands M25 for cable diameters 9-16 mm, pack of 10	10/1	
WAXWSW-00008-C009	FutureCom [™] Patch Cable Guides, 1U, black	2/1	
WAXWSW-00000-C009	FutureCom™ Patch Cable Guides, 1U, stainless steel	2/1	
LANS-PATCH-RTR-B	LANscape 19" Jumper management, 1U, black	1/1	
LANS-PATCH-RTR-G	LANscape 19" Jumper management, 1U, grey	1/1	5555
ADPT-KIT-12-AD	Pack of 12 LC PC DUP Adapters for LAN1	1/1	
ADPT-KIT-12-AE	Pack of 12 LC UPC DUP Adapters for LAN1	1/1	



Accessories

Part Number	Product Description	Units Per Delivery
ADPT-KIT-12-E7	Pack of 12 SC PC DUP Adapters for LAN1	1/1
ADPT-KIT-12-72	Pack of 12 SC UPC DUP Adapters for LAN1	1/1

Cleaning Accessories

Part Number	Product Description	Units Per Delivery	
CLEANER-PORT-LC	Single-fibre Port Cleaner for LC, keyed LC, and MU connector end faces for both UPC and APC polishes	1/1	
CLEANER-PORT-2.5	Single-fibre Port Cleaner for all 2.5 mm ferruled connectors such as FC, SC and ST® compatible; effective for PC, UPC and APC polishes	1/1	



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY 00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2018 Corning Optical Communications. All rights reserved.

