

# FREEDM™ Gel-Free Indoor/Outdoor Cable

8F G50 MMF ClearCurve® OM2

CORNING

FREEDM™ gel-free MPC (Multipurpose Cables) can be deployed both indoor and outdoor for campus backbone and building backbone (riser) cabling as well as for the cabling between floor distributors. The innovative dry, gel-free design with water-blocking technology eliminates the need for traditional flooding compound, providing more efficient and craft-friendly cable preparation. The cables can be installed in conduits, ducts and be buried directly in the ground.

## Features and Benefits

### Dry, gel-free tube

Needs minimal cleaning, saving about 20 minutes per fan-out (12 fibres), splicing is made faster and more accurate, resulting in reliable, consistently low-loss terminations

### All-dielectric cable construction

Requires no grounding or bonding

### Laminated swelling glass yarns

Improved rodent resistance and longitudinal water protection

### UV- and microbe-resistant

Can be installed in ducts or conduits

### Small diameter and bend radius

Easy installation in space-constrained areas

### Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

### Waterblocking technology



OSP (outdoor) applications

### Silicon-free outer jacket

The cable jacket is free of harmful to paint structures

### Flame retardant

LSZH™/FRNC

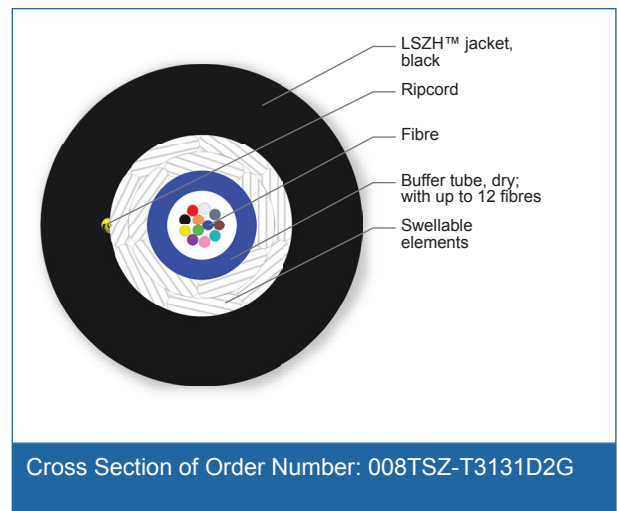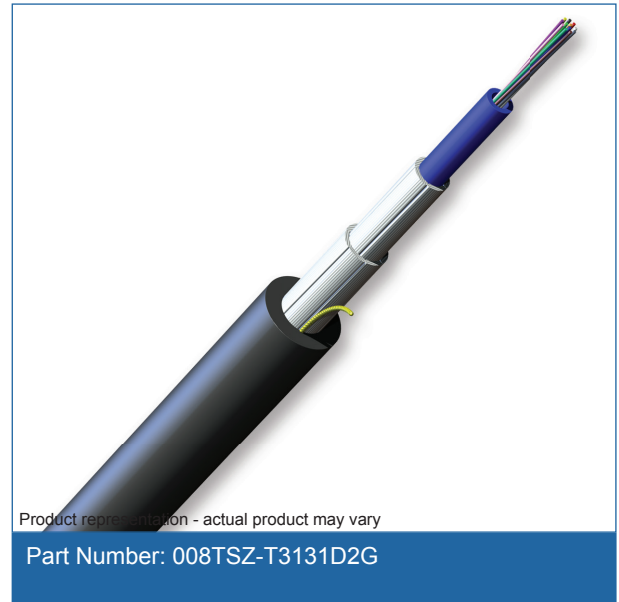

# FREEDM™ Gel-Free Indoor/Outdoor Cable

8F G50 MMF ClearCurve® OM2

CORNING

## Standards

<b>Flame Test Method</b>	Flame retardant to IEC 60332-1-2 (single cable); IEC 60332-3-24 (bunch of cables) Reaction to fire according to EN 50575 and EN 13501-6 Low Smoke to IEC 61034 Non Corrosive to IEC 60754-2
<b>Waterblocking</b>	IEC 60794-1-2F5

## Specifications

General Specifications	
Environment	Indoor/Outdoor Universal Cable
Application	Aerial, Direct Buried, Duct, General Purpose Horizontal
Cable type	Loose Tube
Product type	Dielectric armour
Flame rating	LSZH™/FRNC
Reaction to fire	Dca,s2,d2,a1
Fibre Category	50 µm MM (OM2)

Temperature Range	
Installation and assembly	-10 °C to 60 °C
Operation	-30 °C to 70 °C
Storage	-30 °C to 70 °C

Cable Design	
Fibre count	8
Fibre colouring	Blue, Orange, Green, Brown, Grey, White, Red, Black
Fibres per tube	8
Number of tube positions	1
Tensile Strength Elements and/or Armouring - Layer 1	Dielectric strength members
Tensile strength elements and/or armouring - Layer 2	Water-swellaible dielectric strength members
Number of ripcords	1

# FREEDM™ Gel-Free Indoor/Outdoor Cable

8F G50 MMF ClearCurve® OM2

CORNING

## Cable Design

Outer jacket material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer jacket colour	Black

## Mechanical Characteristics Cable

Weight	42 kg/km
Nominal Outer Diameter	6.6 mm
Max. tensile strength, short-term	1000 N
Max. Tensile Strength, Long-Term	300 N
Min. Bend Radius Installation	99 mm
Min. Bend Radius Operation	66 mm

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Fibre Specifications

### Optical Characteristics (cabled)

Fibre core diameter	50 µm
Fibre Category	OM2
Fibre code	T
Performance Option Code	31
Wavelengths	850 nm / 1300 nm
Maximum attenuation	3.0 dB/km / 1.0 dB/km
Serial 1 gigabit ethernet	750 m / 500 m
Serial 10 gigabit ethernet	150 m / -
Min. overfilled launch (OFL) bandwidth	700 MHz*km / 500 MHz*km
Minimum effective modal bandwidth (EMB)	950 MHz*km / -

Notes: 1) 50 µm multimode fibre macrobend loss  $\leq 0.2$  dB at 850 nm for two turns around 7.5 mm radius mandrel  
2) Improved attenuation and bandwidth options available  
3) Bend-insensitive single-mode fibres available on request.  
4) Contact a Corning Customer Care Representative for additional information

# FREEDM™ Gel-Free Indoor/Outdoor Cable

8F G50 MMF ClearCurve® OM2



## Ordering Information

Part Number	008TSZ-T3131D2G
Product Description	FREEDM™ Gel-Free Indoor/Outdoor Cable 8F G50 MMF ClearCurve® OM2, Dca,s2,d2,a1



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified.  
© 2017 Corning Optical Communications. All rights reserved.