


# Everon® Copper Datacom xs500 Copper Jack Cat.6A, Keystone, AWG 22-24, single pack

CORNING

**Part Number:**  
**CAXXSM-00104-C001**

Our Cat.6A copper interconnect products work together to provide an easy-to-use solution for deploying high-speed connections throughout a building. The RJ45 jack is a key component in this system. These RJ45 jacks have been certified by an independent test laboratory to hardware certification. Each jack component is able to terminate to any certified Cat.6A TIA, ISO/IEC and EN standards for hardware performance, confirmed by independent laboratory certifications. The jack's unique three cable entry points help make installation simple. The traditional one-click design enables an easy, tool-less termination on Cat. 6A shielded twisted pair cables, meeting industry performance standards.

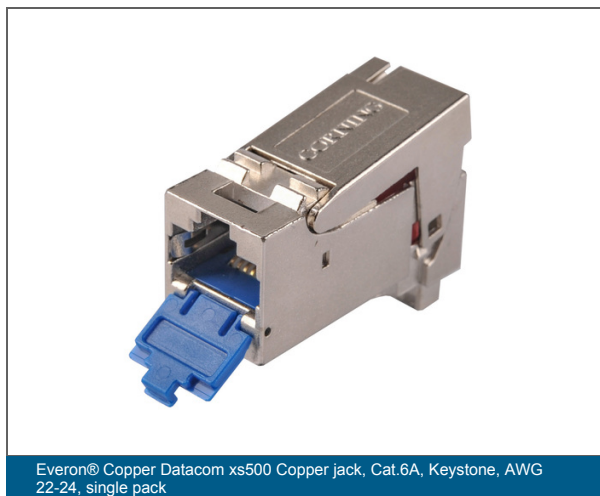

Everon® Copper Datacom xs500 Copper jack, Cat.6A, Keystone, AWG 22-24, single pack

## Features and Benefits

Fulfills the requirements for the 2 and 4 connector model according to E Class

3-Connector Permanent Link / Channel, certified by independent testing body

Suitable for EA Class applications according to ISO/IEC 11801 and EN 50173

Industry standard Keystone dimensions

Compatible with existing Corning LANscape Hardware with an adaptor

Easy and quick installation (2-piece design), no special tool needed

Integrated dust cap (colour coding possible with accessories)


All components are certified as Category 6A according to ISO/IEC 11801

### PVP Certificate

Certifié par un laboratoire d'essai indépendant et impartial (GHMT AG)

Strain-relief without cable tie possible

Tested and approved for Power over Ethernet applications (PoE/PoE+/4PPoE) according to IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt up to 90W

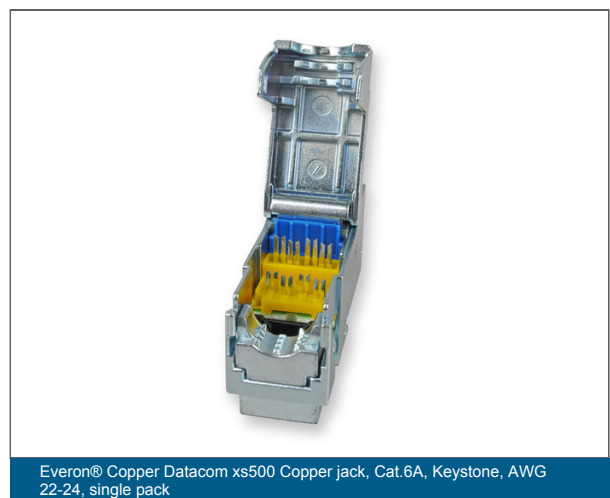

Everon® Copper Datacom xs500 Copper jack, Cat.6A, Keystone, AWG 22-24, single pack

# Everon® Copper Datacom xs500 Copper Jack Cat.6A, Keystone, AWG 22-24, single pack



Everon® Copper Datacom xs500 Copper jack, Cat.6A, Keystone, AWG 22-24, single pack



Everon® Copper Datacom xs500 Copper jack, Cat.6A, Keystone, AWG 22-24, single pack

## Specifications

General Specifications	
Dust protection	Yes
Product category	Core product
Category	6A
Halogen-free	Yes
Bandwidth	500 MHz

Standards	
Flame retardance	Class UL94 V-0
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Transmission performance link	Class EA (ISO/IEC 11801 Ed. 2.2 2011)
Component Standard	IEC 60603-7-51 (Edition 1.0 2010)

# Everon® Copper Datacom xs500 Copper Jack Cat.6A, Keystone, AWG 22-24, single pack

CORNING

## Environmental Conditions

Environmental compatibility	Recyclable and free of heavy metal
Temperature range, installation	-40 °C to 70 °C

## Design

Jack Type	RJ45 - 8/8
Number of Pieces	2
Housing material	Metal
Insulation diameter max.	9 mm
Wire Conductor+Insulation diameter max.	17 mm

## Mechanical Specifications

Durability of RJ45 Jack (PoE)	≥ 750 mating cycles under load (48 volt, 15.4 watt) in compliance with technical transmission parameters
Durability of RJ45 Jack	≥ 750 mating cycles possible, EN 186000-1, test 4.5.32
Cable Entry	0° to 360° Shield contact and strain relief
IDC Contacts	Suitable for AWG 24-22 solid wires
Contact surface	Gold pad in contact area
Reproducibility	Several times reusable
Housing material	Metal

## Electrical Specifications

Input to output DC Resistance Unbalance	50 MΩ
Input to output DC Resistance	200 MΩ
Electric strength DC (conductor/conductor)	≥ 1000 V DC/AC peak
Electrical strength DC (conductor/test plate)	≥ 1500 V DC/AC peak
Insulation resistance	≥ 500 (DC) MΩ*km
Transfer Impedance	≤ 200 mΩ at 10 MHz

# Everon® Copper Datacom xs500 Copper Jack Cat.6A, Keystone, AWG 22-24, single pack

CORNING

## Dimensions

Height	19.6 mm
Width	14.5 mm
Depth	35 mm
Weight	19 g

## Ordering Information

Product Number	CAXXSM-00104-C001
EAN Code	4042673589730
Shipping weight	21 g
Units per delivery	1/1



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany  
+00 800 2675 4641 • FAX: • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)