

Central Tube Steel Armor Indoor/Outdoor Cable 1x12 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Part Number:
012TEY-13188H2G

Corning MPC (multipurpose cable) central tube cables with corrugated steel armoring are flame-retardant, indoor/outdoor cables designed for interbuilding and intrabuilding backbones in duct, direct burial and riser applications.

The central tube cable construction, by isolating the fibers from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibers are color coded for quick, easy identification.

The cable construction, based on a central buffer tube, is compact, light, flexible and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts, direct burial and in-house.

Features and Benefits

Waterblocking technology

OSP (outdoor) applications

UV- and microbe-resistant

Can be installed in ducts or conduits

Corrugated steel armoring

Rodent, mechanical protection and direct buried applications

Small diameter and bend radius


Easy installation in space-constrained areas

Fibers color coding to Telcordia-Bellcore

Easy identification of the individual fibers

Flame retardant

LSZH™/FRNC

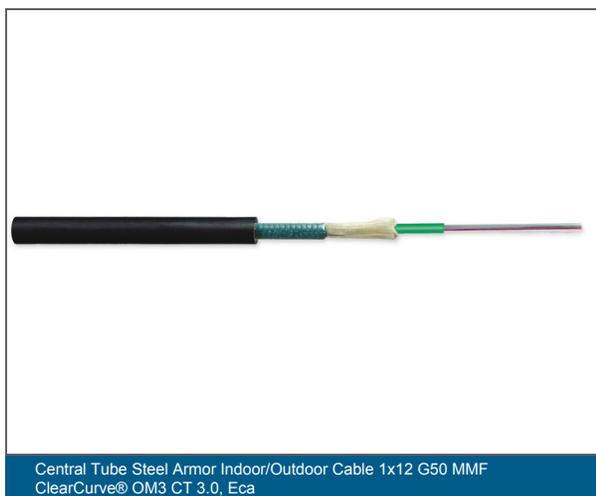

Central Tube Steel Armor Indoor/Outdoor Cable 1x12 G50 MMF ClearCurve® OM3 CT 3.0



Specifications

General Specifications	
Environment	Indoor/Outdoor
Cable Type	Single Tube
Product Type	Corrugated Steel Armor
Fiber Category	50 µm MM (OM3)
Flame Rating	LSZH™/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)(SR)H
Application	Direct Buried, Duct, Vertical Riser, General Purpose Horizontal

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Flame Test Method	Flame retardant according to IEC 60332-1-2 (single cable), Reaction to fire according to EN 50575 and EN 13501-6, Low smoke according to IEC 61034 and zero halogen to IEC 60754-1, Non-corrosive according to IEC 60754-2
Waterblocking	IEC 60794-1-2 F5
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable)
Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low Smoke to IEC 61034
Halogen content test	Zero Halogen to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2
Reaction to fire	Eca

Environmental Conditions	
Temperature Range, Installation	-5 °C to 50 °C
Temperature Range, Storage	-40 °C to 75 °C
Temperature Range, Operation	-30 °C to 75 °C

Central Tube Steel Armor Indoor/Outdoor Cable 1x12 G50 MMF ClearCurve® OM3 CT 3.0



Environmental Conditions

Temperature Range, Storage (Stored on drum with original packing)	-40 °C to 75 °C
---	-----------------

Cable Design

Cable Marking	Meter - Handset - CE 17 EN 50575 Eca - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)(SR)H 12 OM3CC CT 3.0 LSZH(TM)/FRNC
Fiber Count	12
Number of Ripcords	2
Outer Jacket Color	Black
Outer Jacket Material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer Jacket Nominal Thickness	1.5 mm
Tensile Strength Elements and/or Armoring - Layer 1	Aramid yarn with swellable elements
Buffer Tube Diameter	3 mm
Buffer Tube Water Blocking	Thixotropic Gel
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua

Mechanical Specifications

Crush Resistance	2000 N/10 cm
Max. Tensile Strength for Installation	1000 N
Min. Bend Radius Installation	150 mm
Min. Bend Radius Operation	110 mm
Nominal Outer Diameter	7.5 mm
Fire Load	1.16 MJ/m

Optical Characteristics

Fiber Code	T
------------	---

Central Tube Steel Armor Indoor/Outdoor Cable 1x12 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

Optical Characteristics

Fiber Name	G50/125 ULTRA-BEND 7.5
Fiber Type	Multimode
Fiber Core Diameter	50 µm
Minimum Effective Modal Bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. Overfilled Launch (OFL) Bandwidth	1500 MHz*km / 500 MHz*km
Serial 1 Gigabit Ethernet	1100 MHz*km / 600 MHz*km
Serial 10 Gigabit Ethernet	300 MHz*km/ 333 MHz*km
Typical Attenuation	2,4 dB/km / 0,8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fiber Category	OM3

Ordering Information

Product Number	012TEY-13188H2G
EAN Code	4042673603283
Maximum Delivery Length	4000 m
Weight	76 kg/km



Corning Optical Communications GmbH & Co. KG • Lelpziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2023 Corning Optical Communications. All rights reserved.