

Everon™ Copper Datacom S/FTP 800/23, Industrial Category 7, PUR, Fca 4P, Violet



Part Number:
CCXIPB-F0047-C001-L7

The Everon™ Copper Datacom S/FTP 800/23 Industrial cable is designed up to 800MHz and its transmission characteristics exceed Category 7 specifications according to EN50288-4-1 IEC 61156-5. High system margins for the complete link according to the last version of ISO/IEC 11801 and EN 50173 (Series) will be achieved by using corresponding hardware together with this highend copper cable. Due to the very low delay skew between the pairs these FutureCom cables are especially suitable for Gigabit Ethernet and also for transmission of digital data for future applications up to 10 Gigabit Ethernet according to IEEE 802.3an. The cable has a streamlined construction and low weight. Overall shielding with tinned copper wire braiding and each twisted pair is individually shielded with a Allaminated foil (S/FTP). The cable satisfies Class B interference radiation standards according to EN 55022, as well as immunity according to EN 55024, which enables the realization of CE-compatible networks.

Features and Benefits

S/FTP 800/23 Industrial cable designed up to 800 MHz

Fulfil all requirements of category 7 EN50288-4-1 and IEC 61156-5

Suitable for Classe D to F according to ISO/IEC 11801. EN50173 and 10 Gigabit Ethernet according to IEEE 802.3an

Tested and approved for Power over Ethernet applications (PoE/PoE+/4PPoE) according to IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt up to 90W


Certified by a vendor-independent and impartial test lab

PUR Industrial jacket

Overall shielding with tinned copper wire braiding and each twisted pair is individually shielded with a Allaminated foil (S/FTP)

Length marking on jacket

Fca

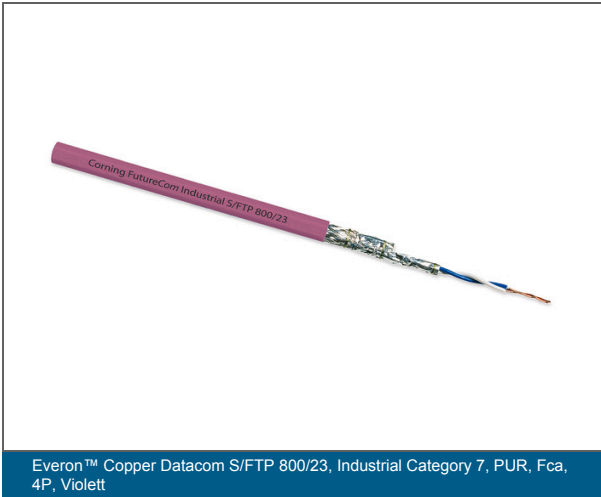

Everon™ Copper Datacom S/FTP 800/23, Industrial Category 7, PUR, Fca 4P, Violet

CORNING

Specifications

General Specifications

Environment	Industrial
Category	7
Cable type	S/FTP
Bandwidth	800 MHz
Halogen-free	Yes
Construction	Simplex, 4P
Reaction to fire	Fca
Legacy Part Number	CCXIPB-F0047-C001-L7
Brand	Everon™

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	IEC 61156-5; EN 50288-4-1, ISO/IEC 11801 Ed. 2.2; EN 50173-1, ANSI/TIA -568-C-2; IEC60304
Design And Test Criteria	1000 Base-T IEEE 802.3 an; PoE / PoE++ IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
Smoke density	IEC 61034-2
Halogen content test	Zero Halogen to IEC 60754-1

Environmental Conditions

Halogen-free	Yes
Temperature range, installation	0 °C to 50 °C
Temperature range, operation	-20 °C to 60 °C

Cable Design

Conductor	Copper Wire, AWG 23/1
-----------	-----------------------

Everon™ Copper Datacom S/FTP 800/23, Industrial Category 7, PUR, Fca 4P, Violet

CORNING

Cable Design

Conductor insulation	Halogen-free foam-skin material
Twisting	2 cores to a pair
Pair screen	Al-laminated foil around each pair
Outer jacket material	PUR
Outer jacket colour	Violet

Mechanical Characteristics

Fire load	740 MJ/km
Nominal outer diameter	7.5 mm
Min. bend radius installation	8x Cable-Ø
Min. bend radius operation	3x Cable-Ø (over flat side)
Maximum tensile strength	154 N

Electrical Characteristics

Conductor resistance unbalance	1 %
Delay skew	9 ns/100 m
Max. loop resistance	154 Ω/km
Propagation delay	425 ns/100 m
Voltage rating	Less than 75 V d.c max and less than 50 V a.c max
Surface transfer impedance	10 mΩ
Propagation velocity at >10 MHz (NVP*c)	79 %
Coupling attenuation	85 dB
Insulation Resistance	> 5000 MΩ*km

Dimensions

Length	1000 m
--------	--------

Everon™ Copper Datacom S/FTP 800/23, Industrial Category 7, PUR, Fca 4P, Violet

CORNING

Ordering Information

Product Number	CCXIPB-F0047-C001-L7
Weight	64 kg
Packing type	Drum
Units per delivery	1/1

Electrical Characteristics

Frequency [MHz]	1	4	10	100	300	600	800	1000
Attenuation according to Standard [db/100m]	2.0		5.7	18.5	33.3			
Typical attenuation [db/100m]	1.8	3.4	5.0	16.9	30.7	43.0	51.0	58.0
NEXT according to Standard [db/100m]	80.0		80.0	72.4	65.3			
Typical NEXT Values [db/100m]	102.0	102.0	102.0	102.0	95.0	92.0	90.0	80.0
ACR-N according to Standard [db/100m]	78.0		74.3	53.9	32.0			
Typical ACR-N Values [db/100m]	100.2	98.6	87.0	85.1	64.3	49.0	39.0	22.0



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2023 Corning Optical Communications. All rights reserved.