

# Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

**Part Number:**  
**004TEU-13188A2G**

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres in are color coded for quick, easy identification.

The cable construction, based on a central buffer tube, is very compact, light and flexible, and ideal for connections requiring a moderate fiber count.

These cables are designed for installation in conduits, ducts and in-house.

## Features and Benefits

**All-dielectric cable construction**

Requires no grounding or bonding

**Laminated swelling glass yarns**

Improved rodent resistance and longitudinal water protection

**UV- and microbe-resistant**

Can be installed in ducts or conduits

**Small diameter and bend radius**

Easy installation in space-constrained areas

**Fibres colour coding to Telcordia-Bellcore**

Easy identification of the individual fibres

**Waterblocking technology**


OSP (outdoor) applications

**Silicon-free outer jacket**

The cable jacket is free of harmful to paint structures

**Flame retardant**

LSZH™/FRNC

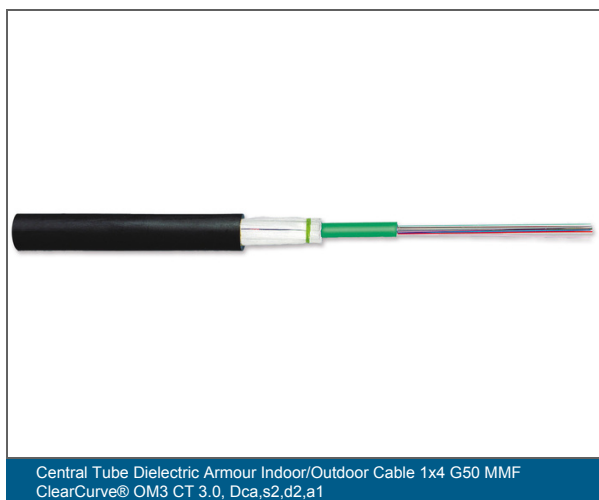

Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF  
ClearCurve® OM3 CT 3.0, Dca,s2,d2,a1

# Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

## Specifications

### General Specifications

Environment	Indoor/Outdoor
Cable type	Single Tube
Product type	Dielectric armour
Fibre category	50 µm MM (OM3)
Flame rating	LSZH™/FRNC
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	U-DQ(ZN)BH
Application	Duct, Vertical Riser, General Purpose Horizontal

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Flame Test Method	Flame retardant according to IEC 60332-1-2 (single cable), Reaction to fire according to EN 50575 and EN 13501-6, Low smoke according to IEC 61034 and zero halogen to IEC 60754-1, Non-corrosive according to IEC 60754-2
Waterblocking	IEC 60794-1-2 F5
Flame propagation test	Flame retardant according to IEC 60332-1-2 (single cable)
Reaction to fire requirements	Reaction to fire according to EN 50575 and EN 13501-6
Smoke density	Low Smoke to IEC 61034
Halogen content test	Zero Halogen to IEC 60754-1
Level of corrosion	Non-corrosive according to IEC 60754-2

### Environmental Conditions

Temperature range, installation	-5 °C to 50 °C
Temperature range, storage	-25 °C to 70 °C
Temperature range, operation	-20 °C to 60 °C

# Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

## Cable Design

Cable marking	Metre - Handset - CE 17 EN 50575 Dca,s2,d2,a1 - Sine - CORNING - Fiber Optic Cable - Year - U-DQ(ZN)BH 4 OM3CC CT 3.0 LSZH(TM)/FRNC
Fibre count	4
Number of ripcords	1
Outer jacket colour	Black
Outer jacket material	Flame-retardant, non-corrosive/low-smoke, zero-halogen (FRNC/LSZH) material
Outer jacket nominal thickness	1.2 mm
Tensile strength elements and/or armouring - Layer 1	Laminated swelling glass yarn armour
Buffer tube diameter	3 mm
Fibre colouring	Blue, orange, green, brown

## Mechanical Specifications

Crush resistance	1500 N/10 cm
Fire load	0.94 MJ/m
Max. tensile strength for installation	1000 N
Min. bend radius installation	130 mm
Min. bend radius operation	100 mm
Nominal outer diameter	6.6 mm

## Optical Characteristics

Fibre code	T
Fibre name	G50/125 ULTRA-BEND 7.5
Fibre Type	Multimode
Fibre core diameter	50 µm
Minimum effective modal bandwidth (EMB)	2000 MHz*km / -
Maximum Attenuation	2.8 dB/km / 1.0 dB/km
Min. overfilled launch (OFL) bandwidth	1500 MHz*km / 500 MHz*km

# Central Tube Dielectric Armour Indoor/Outdoor Cable 1x4 G50 MMF ClearCurve® OM3 CT 3.0

CORNING

## Optical Characteristics

Serial 1 gigabit ethernet	1100 MHz*km / 600 MHz*km
Serial 10 gigabit ethernet	300 MHz*km/ 333 MHz*km
Typical attenuation	2.4 dB/km / 0.8 dB/km
Wavelengths	850 nm / 1300 nm
Induced Attenuation	For 7.5 mm radius < 0.2 db / -
Fibre category	OM3

## Ordering Information

Product Number	004TEU-13188A2G
EAN Code	4042673343974
Maximum delivery length	4000 m
Weight	46 kg/km



Corning Optical Communications GmbH & Co. KG • Leipzig Strasse 121 • 10117 Berlin, Germany  
+00 800 2675 4641 • FAX: +49 30 5303 2335 • [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2023 Corning Optical Communications. All rights reserved.